


Document ID: #140513KL-OPM

Katalox Light® media should to be properly backwashed & rinsed before placing into Service.

Installation Basic (for the first time installation only!):

1. Open the bag of fresh Katalox Light® media and put into the Pressure Vessel/container.
2. Fill up the pressure vessel/container with fresh water from bottom to the top (as in Backwash mode).
3. Start backwashing the media for at least 60 minutes (or if any fines are still visible in the backwash water) at 25 - 30 m/h (10 - 12 gpm/ft²).
4. After backwashing, Fast Rinse the media for 15-20 minutes @ 20 m/h (8 gpm/ft²)

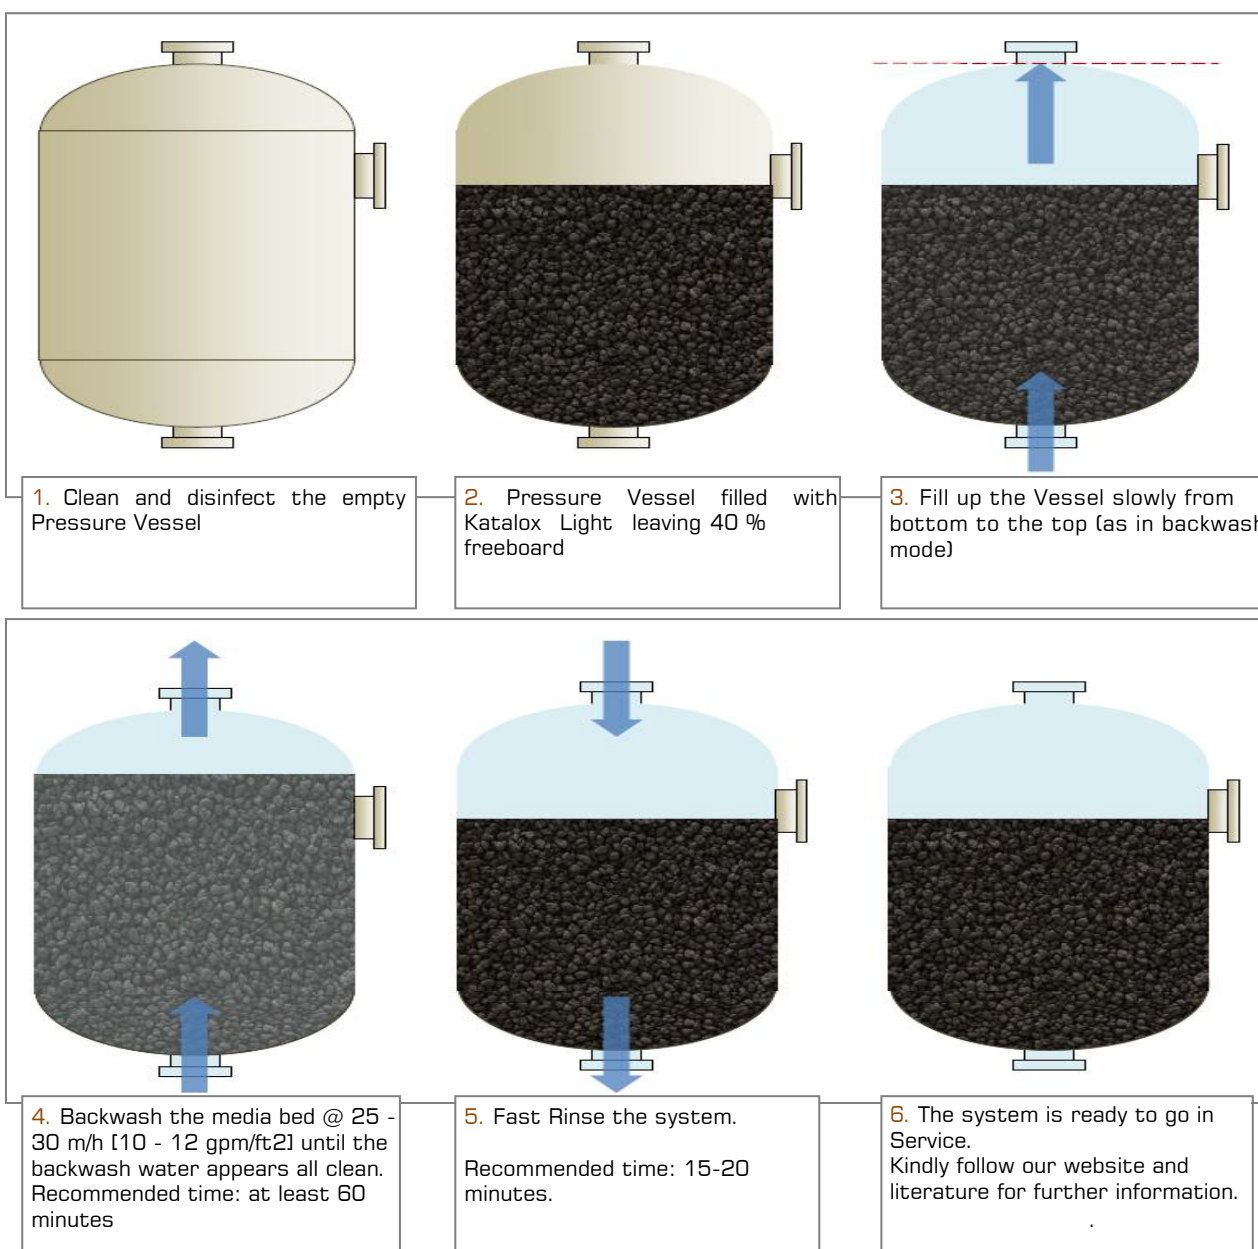

www.kataloxlight.com

Watch -Water®
A Water Company

Watch-Water®, USA
bp@watchwaterproducts.com
Watch-Water®, Germany
info@watchwater.de
Watch-Water®, India
info@watchwater.in

UNITING THE WORLD of
WATER